

Broadband Extender Flex 1000 Kit

Flexible and easy-to-use broadband extension anywhere around your home

Broadband Extender Flex 1000 Kit offers a pair of high performance Homeplug powerline adaptors designed to increase the range of your broadband in the home.

Want to connect your device to the internet?

Use your home's power sockets to extend your broadband

Need high-speed internet all over your home?

Ideal for streaming HD / 3D TV or online gaming via an ethernet cable.


Want to get the most from your fibre broadband?

Extend your super-fast broadband speed to any wired device.



Main Features

- Uses your home's electrical wiring to extend your broadband network anywhere in the house
- Works with all broadband providers
- Link with other HomePlug AV powerline adaptors
- HomePlug AV1000 powerline technology
- Compatible with AV200, AV500 & AV2 technology devices
- Up to 1000 Mbps* for smooth HD / 3D streaming
- Multiple HD / 3D video streaming
- Secure network – no configuration necessary
- Works out of the box
- Built-in power saving
- Pass-through socket
- Two Gigabit Ethernet ports for multiple wired devices

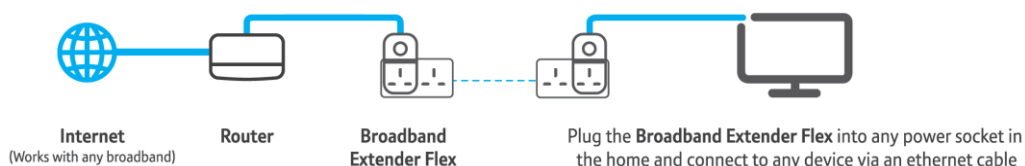

Product Specification

System requirements

- Works with any operating system

Security

- 128 bit AES

Standards

- HomePlug AV2

Transmission speed up to

- 1000 Mbps*

Package content

- 2 x Broadband Extender Flex 1000
- 2 x Ethernet Cable
- Quick Start Guide

Power Supply

- 230V \pm 15%, 50Hz \pm 3%

Environment

- Operating Temp: 0 to 40°C
- Operating Humidity: 10% to 90%

Lights

- Power, Ethernet (Blue), Data (Tri-colour)

Buttons

- Link

Ports

- 2 x GigE RJ45 (IEEE 802.3 10/100/1000 Mbps)

Max HomePlug Nodes


- 8

Power consumption

- 5.2 W In Operation
- 3.5 W Network standby
- 0.5 W Standby mode

Weight & dimensions (cm)

- 21.0(g), 6.2 (W) x 6.9 (L) x 12.9 (H)

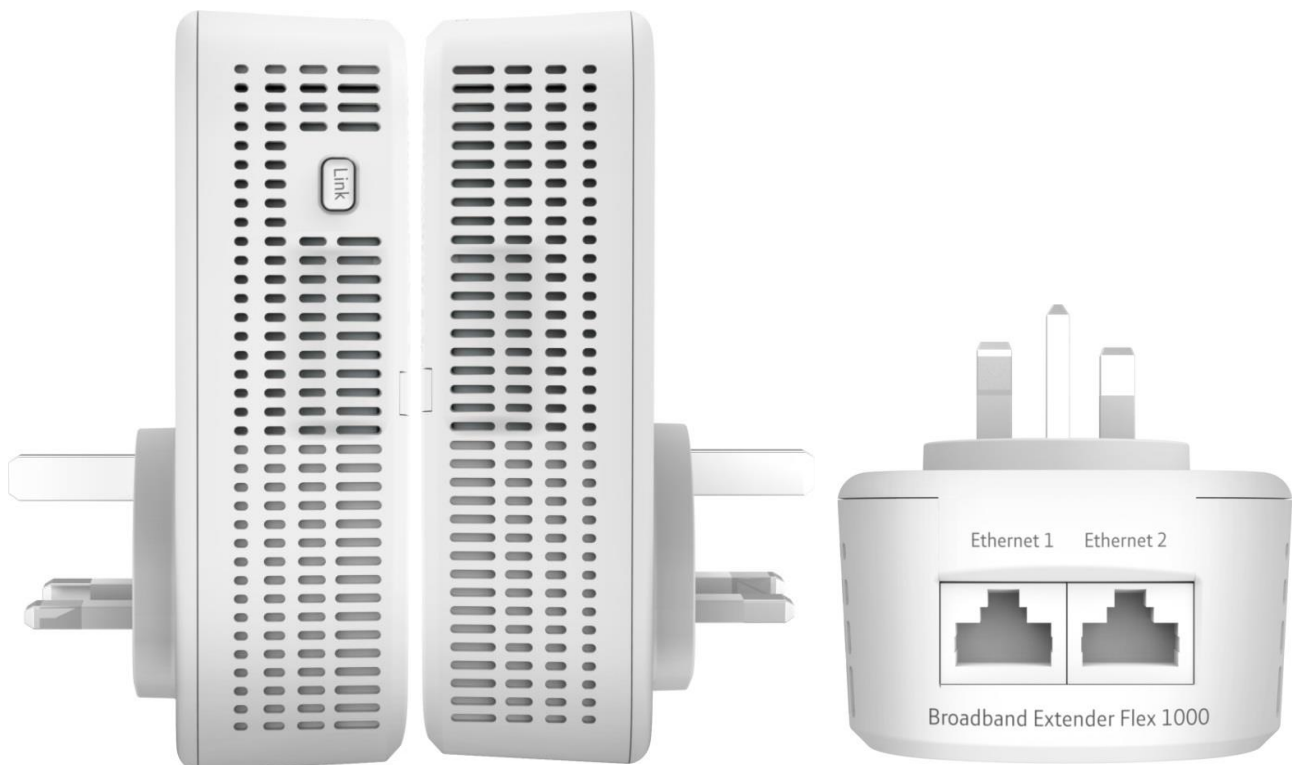

*This is the theoretical maximum channel data rate. Actual speeds will vary with network conditions such as; distance, quality of electrical wiring and electrical noise caused by other appliances.

Product Information

Weights and dimensions BE Flex 1000 (gms): 21.0 BE Flex 1000 (cm): 6.2 (W) x 6.9 (L) x 12.9 (H)	Item code 080219
Giftbox – dimensions (W x L x H) / complete / empty Dimensions (cm): 18.8 x 11.0 x 15.7 Weight – complete (gms): 75.0 Weight – empty (gms): 124	Giftbox barcode 5016351617007
Overpack – dimensions (W x L x H) / complete Dimensions (cm): 32.9 x 21.4 x 57.6 Weight – complete (kgs): 15.7 No. of giftboxes per overpack 20 Pallet Ti's x Hi's: 6 x 4	Overpack barcode 05016351823224
	CSS code

Packaging Details	Paper	Cardboard	Plastics	Shrink Wrap	Other
Item packaging (kgs)		0.07	0.02		
Inner Carton (kgs)	0.02	0.12			
Outer Carton (kgs)		0.65			

Technical support:

Available from the BT Helpdesk on Freephone 0808 100 6116 or via the email link on the product page at www.bt.com/producthelp

Status: Launched

Country of manufacture: China